





VIS AUTOPERCEUSE STANDARD / STANDARD SELF DRILLING SCREW

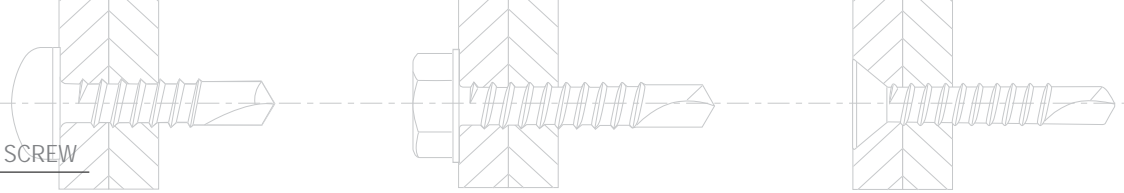

THT VIS AUTOPERCEUSE / SELF DRILLING SCREW

Tête hexagonale avec collerette crantée / Hex washer head with serration

Acier zingué / C1022 Hardened zinc plated



Ø mm	Ref	L mm	G mm				
				N	N	N	t/min
3.5 	THT5-35010	10	4	2.0	2 930	5 000	2 800
	THT5-35013	13	7				
	THT5-35016	16	10				
	THT5-35019	19	13				
	THT5-35025	25	19				
3.9 	THT5-39013	13	7	2.5	3 650	6 000	3 800
	THT5-39016	16	10				
	THT5-39019	19	13				
4.2 	THT7-42013	13	6	3.0	4 360	7 000	4 800
	THT7-42016	16	9				
	THT7-42019	19	12				
	THT7-42022	22	15				
	THT7-42025	25	18				
	THT7-42032	32	25				

Ø mm	Ref	L mm	G mm				
				N	N	N	t/min
4.8 	THT8-48013	13	4	4.0	6 280	10 000	7 000
	THT8-48016	16	7				
	THT8-48019	19	10				
	THT8-48022	22	13				
	THT8-48025	25	16				
	THT8-48032	32	23				
	THT8-48038	38	29				
	THT8-48045	45	36				
	THT8-48050	50	41				
	THT8-55019	19	9				
THT8-55022	22	12					
THT8-55025	25	15					
THT8-55032	32	22					
THT8-55038	38	28					
THT8-55045	45	35					
THT8-55050	50	40					
THT8-55063	63	53					
THT8-55075	75	65					

Ø mm	Ref	L mm	G mm				
				N	N	N	t/min
6.3 	THT10-63019	19	8	6.0	12 270	17 000	17 000
	THT10-63022	22	11				
	THT10-63025	25	14				
	THT10-63032	32	21				
	THT10-63038	38	27				
	THT10-63045	45	34				
	THT10-63050	50	39				
	THT10-63063	63	52				
	THT10-63075	75	64				
	THT10-63100	100	89				
	THT10-63125	125	114				
	THT10-63150	150	139				

L Longueur / Length
G Capacité d'assemblage / Capacity of assembly
 Capacité de perçage / Drilling capacity
 Cisaillement / Shear
 Traction / Tensile
 Torsion / Torque
 Vitesse max. / Max. speed

